

AOV/MOV Pressure Sensors

Features

- Accuracy: 0.50 % of Full Scale
- Wide range available
- Robust integrated connector
- Adapter cable (included) connects to QUIKLOOK cable sets or directly to the QUIKLOOK System
- TEDS Sensor Recognition (QUIKLOOK 3)



AOV Pressure Sensor


AOV Pressure Sensors

Teledyne Test Services offers a full line of pressure sensors for use with the QUIKLOOK Test Systems. These ruggedized highly accurate sensors are used to capture test pressures such as diaphragm, line and supply pressure as well as I/P output pressure and are available in a variety of ranges. All AOV Pressure sensors include a QUIKLOOK adapter cable.

Teledyne AOV Pressure Sensors are available in the following ranges:

P/N	System	PSIG Range*
159145-30	QL2	0-30
160534-30	QL3	0-30
159145-50	QL2	0-50
160534-50	QL3	0-50
159145-100	QL2	0-100
160534-100	QL3	
159145-150	QL2	0-150
160534-150	QL3	
159145-200	QL2	0-200
160534-200	QL3	
159145-500	QL2	0-500
160534-500	QL3	
159145-1000	QL2	0-1000
160534-1000	QL3	

•Other ranges available upon request

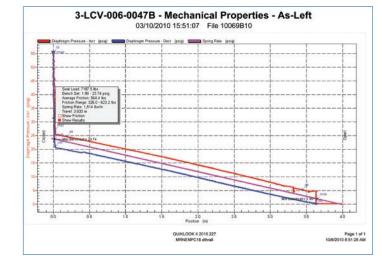

MOV PRESSURE SENSORS

MOV Pressure Sensors

Teledyne Test Services offers a line of pressure sensors for use with the QUIKLOOK Test System. These ruggedized, highly accurate sensors are typically used to capture upstream and downstream pressures during an MOV test, to calculate the differential pressure across the valve during the valve stroke. They are available in a variety of pressure ranges. All MOV pressure sensors include a QUIKLOOK adapter cable.


Features

- Accuracy: 0.1% of Full Scale
- Wide range selection available
- Robust integral connector
- Adapter cable (included) connects to QUIKLOOK cable sets or directly to the QUIKLOOK System
- TEDS Sensor Recognition (QUIKLOOK 3)



P/N	PSI Range*
159145-200	200
159145-500	500
159145-1000	1000

*Other ranges available upon request

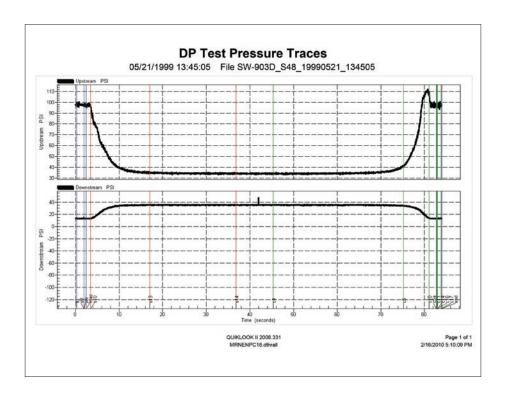

PRESSURE SENSOR INTERFACE (PSI)



The Pressure Sensor Interface is used with QUIKLOOK Systems. Additional accessories include:

P/N	
160079	QSS Adapter Cable (1–channel)
159187	C Clamp Adapter Cable
160080-15	15-in Stem Position Indicator
160080-30	30-in Stem Position Indicator


Pressure Sensor Interface (PSI)

Teledyne Test Services' Pressure Sensor Interface (PSI) offers the AOV tester a convenient package that consolidates six pressure transducers along with position and strain inputs for connection to the QUIKLOOK Systems for AOV testing.

Features

- Six Calibrated Pressure Transducers

 (2) 0 30 psig transducers
 (4) 0 100 psig transducers
 *Other Ranges Available
- Strain Connection
- Position Connection
- Integral 15 ft Cable Set
- Accuracy 0.5 % of Full Scale
- TEDS Sensor Recognition (QUIKLOOK 3)
- Color Coded Cables and Transducers

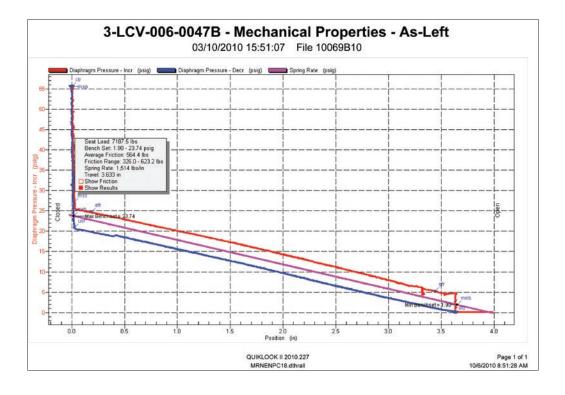



508-748-0103 www.valvetest.com For more information, please visit our website or email sales_testservices@teledyne.com

© 2010 by Teledyne Test Services. All rights reserved. Specifications, prices, availability, and delivery subject to change without notice. Product or brand names are trademarks or requested trademarks of their respective holders.